


Aluminium CSK-120° Standard Rivets

Standard rivets are used in numerous applications to secure two or more components together. Typically used in sheet type products, the Standard rivet is easily installed with access only required from one side of the assembly.

Material: Body: Aluminium
Mandrel: Carbon Steel

Finish: Body: Plain Finish
Mandrel: Zinc Plated

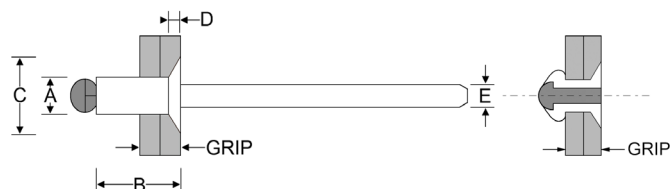

Diameter mm	Part Code	Grip Range mm	Hole Size (nom) mm	A mm	B mm	C mm	D mm	E mm	Shear (min) KN	Tensile (min) KN	Box Qty pcs
3.2	72AS-0402	1.60 - 3.20	3.30	3.20	6.70	5.80	1.10	1.80	0.76	0.98	1000
	72AS-0403	3.20 - 4.80	3.30	3.20	8.20	5.80	1.10	1.80	0.76	0.98	1000
	72AS-0404	4.80 - 6.40	3.30	3.20	9.70	5.80	1.10	1.80	0.76	0.98	1000
	72AS-0405	6.40 - 7.90	3.30	3.20	11.1	5.80	1.10	1.80	0.76	0.98	1000
	72AS-0406	7.90 - 9.50	3.30	3.20	13.0	5.80	1.10	1.80	0.76	0.98	1000
	72AS-0408	9.50 - 12.7	3.30	3.20	16.2	5.80	1.10	1.80	0.76	0.98	1000
4.0	72AS-0502	1.60 - 3.20	4.10	4.00	7.30	7.10	1.40	2.40	1.16	1.56	1000
	72AS-0503	3.20 - 4.80	4.10	4.00	8.90	7.10	1.40	2.40	1.16	1.56	1000
	72AS-0504	4.80 - 6.40	4.10	4.00	10.5	7.10	1.40	2.40	1.16	1.56	1000
	72AS-0505	6.40 - 7.90	4.10	4.00	12.0	7.10	1.40	2.40	1.16	1.56	1000
	72AS-0506	7.90 - 9.50	4.10	4.00	13.6	7.10	1.40	2.40	1.16	1.56	1000
	72AS-0508	9.50 - 12.7	4.10	4.00	16.8	7.10	1.40	2.40	1.16	1.56	500
4.8	72AS-0602	1.60 - 3.20	4.90	4.80	8.00	8.90	1.90	2.70	1.70	2.23	500
	72AS-0603	3.20 - 4.80	4.90	4.80	9.50	8.90	1.90	2.70	1.70	2.23	500
	72AS-0604	4.80 - 6.40	4.90	4.80	11.1	8.90	1.90	2.70	1.70	2.23	500
	72AS-0606	7.90 - 9.50	4.90	4.80	14.3	8.90	1.90	2.70	1.70	2.23	500
	72AS-0608	9.50 - 12.7	4.90	4.80	17.5	8.90	1.90	2.70	1.70	2.23	500
	72AS-0610	12.7 - 15.9	4.90	4.80	20.7	8.90	1.90	2.70	1.70	2.23	500
	72AS-0612	15.9 - 19.0	4.90	4.80	23.8	8.90	1.90	2.70	1.70	2.23	250
	72AS-0616	22.2 - 25.4	4.90	4.80	31.5	8.90	1.90	2.70	1.70	2.23	250