All Aluminium Dome Standard Rivets

Standard rivets are used in numerous applications to secure two or more components together. Typically used in sheet type products, the Standard rivet is easily installed with access only required from one side of the assembly.



Material: Body: Aluminium
Mandrel: Aluminium

Finish: Body: Plain Finish
Mandrel: Plain Finish

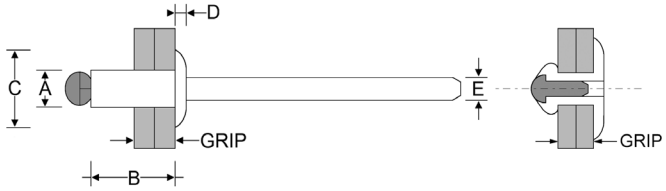

Diameter mm	Part Code	Grip Range mm	Hole Size (nom) mm	A mm	B mm	C mm	D mm	E mm	Shear (min) KN	Tensile (min) KN	Box Qty pcs
2.4	73AA-0302	1.60 - 3.20	2.50	2.40	5.50	4.80	0.60	1.40	0.31	0.36	1000
3.2	73AA-0402	1.60 - 3.20	3.30	3.20	7.00	6.20	1.00	1.80	0.53	0.67	1000
	73AA-0403	3.20 - 4.80	3.30	3.20	8.20	6.20	1.00	1.80	0.53	0.67	1000
	73AA-0404	4.80 - 6.40	3.30	3.20	9.70	6.20	1.00	1.80	0.53	0.67	1000
	73AA-0406	7.90 - 9.50	3.30	3.20	13.0	6.20	1.00	1.80	0.53	0.67	1000
	73AA-0408	9.50 - 12.7	3.30	3.20	16.4	6.20	1.00	1.80	0.53	0.67	1000
4.0	73AA-0502	1.60 - 3.20	4.10	4.00	7.10	7.60	1.20	2.40	0.85	1.02	1000
	73AA-0503	3.20 - 4.80	4.10	4.00	8.70	7.60	1.20	2.40	0.85	1.02	1000
	73AA-0504	4.80 - 6.40	4.10	4.00	10.3	7.60	1.20	2.40	0.85	1.02	1000
	73AA-0506	7.90 - 9.50	4.10	4.00	13.6	7.60	1.20	2.40	0.85	1.02	500
	73AA-0508	9.50 - 12.7	4.10	4.00	17.1	7.60	1.20	2.40	0.85	1.02	500
4.8	73AA-0603	3.20 - 4.80	4.90	4.80	9.80	9.20	1.60	2.80	1.16	1.43	500
	73AA-0604	4.80 - 6.40	4.90	4.80	11.1	9.20	1.60	2.80	1.16	1.43	500
	73AA-0606	7.90 - 9.50	4.90	4.80	14.3	9.20	1.60	2.80	1.16	1.43	500
	73AA-0608	9.50 - 12.7	4.90	4.80	17.5	9.20	1.60	2.80	1.16	1.43	500
	73AA-0610	12.7 - 15.9	4.90	4.80	21.1	9.20	1.60	2.80	1.16	1.43	500
	73AA-0612	15.9 - 19.0	4.90	4.80	24.2	9.20	1.60	2.80	1.16	1.43	250

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
Revised February 2024