


Copper Dome Head Standard Rivets

Standard rivets are used in numerous applications to secure two or more components together. Typically used in sheet type products, the Standard rivet is easily installed with access only required from one side of the assembly.

Material: Body: Copper
Mandrel: Brass

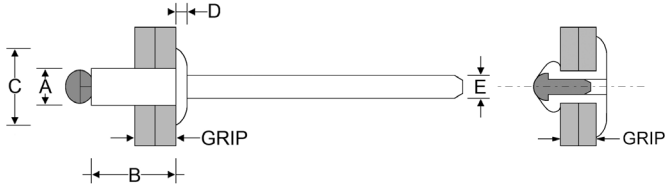

Diameter mm	Part Code	Grip Range mm	Hole Size (nom) mm	A mm	B mm	C mm	D mm	E mm	Shear (min) KN	Tensile (min) KN	Box Qty pcs
3.2	73CB-0402	0.50 - 3.20	3.30	3.20	6.70	6.20	1.00	1.97	0.91	1.20	1000
	73CB-0403	3.20 - 4.80	3.30	3.20	8.20	6.20	1.00	1.97	0.91	1.20	1000
	73CB-0404	4.00 - 6.00	3.30	3.20	9.00	5.50	1.00	1.97	0.91	1.20	1000

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
Revised February 2024