


## Monel Dome Head Standard Rivets

Standard rivets are used in numerous applications to secure two or more components together. Typically used in sheet type products, the Standard rivet is easily installed with access only required from one side of the assembly.

**Material:** Body: Monel  
Mandrel: Carbon Steel

**Finish:** Body: Plain Finish  
Mandrel: Zinc Plated

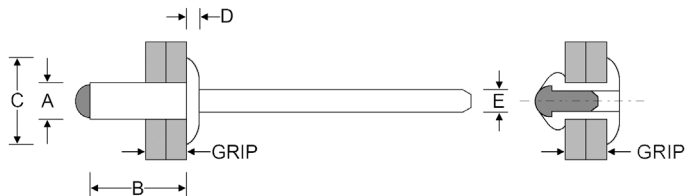

Diameter (A) mm	Part Code	Grip Range (Min ~ Max) mm	Hole Size (Nominal) mm	B mm	C mm	D mm	E mm	Shear (Min) kN	Tensile (Min) kN	Pack Size Pcs
3.20 (1/8)	73MS-0402	1.60 ~ 3.20	3.30	6.70	6.50	1.00	1.80	1.85	2.91	1,000
	73MS-0403	3.20 ~ 4.80		8.20						1,000
	73MS-0404	4.80 ~ 6.40		9.90						1,000
	73MS-0405	6.40 ~ 8.00		11.1						1,000
	73MS-0406	7.90 ~ 9.50		13.0						1,000
	73MS-0408	9.50 ~ 12.7		16.2						1,000
4.00 (5/32)	73MS-0502	1.60 ~ 3.20	4.10	7.30	8.00	1.20	2.40	2.67	3.78	1,000
	73MS-0503	3.20 ~ 4.80		8.90						1,000
	73MS-0504	4.80 ~ 6.40		10.5						1,000
	73MS-0506	7.90 ~ 9.50		13.6						500
	73MS-0508	9.50 ~ 12.7		16.5						500
4.80 (3/16)	73MS-0602	1.60 ~ 3.20	4.90	8.00	9.00	1.60	2.80	3.78	5.34	500
	73MS-0603	3.20 ~ 4.80		9.50						500
	73MS-0604	4.80 ~ 6.40		11.1						500
	73MS-0605	6.40 ~ 7.90		12.6						500
	73MS-0606	7.90 ~ 9.50		14.3						500
	73MS-0608	9.50 ~ 12.7		17.5						500
	73MS-0610	12.7 ~ 15.9		21.7						500
6.40 (1/4)	TLPD850BS	1.80 ~ 7.60	6.50	13.0	11.0	1.60	3.86	5.40	6.75	100
	TLPD870BS	7.60 ~ 12.7		18.0						100

All diagrams and drawings are intended for illustration and measurement purposes only. Dimensions and specifications may change without prior notice. Please refer to your distributor for the most up-to-date data sheet. The test data presented offers approximate average strength values based on multiple tests conducted in various materials and thicknesses. For applications requiring precise strength figures or when the applied load approaches the published values, we strongly recommend conducting tests specific to your use case.

REVISED MAY 2025