


## Stainless Bulb-Lok Rivets

Bulb-Lok Rivets feature a unique dual locking system ideal for applications that require high resistance to vibration, increased shear strength and a weather tight finish. Designed to form a bulb on the blindside, this distinctive feature increases load spread, prevents pull through and is widely used when securing Thick-to-Thin components or sheet type products. Available in a wide combination of diameters, grip ranges and materials.



**Material:** Body: 304 Stainless Steel **Finish:** Body: Natural  
Mandrel: 304 Stainless Steel Mandrel: Natural

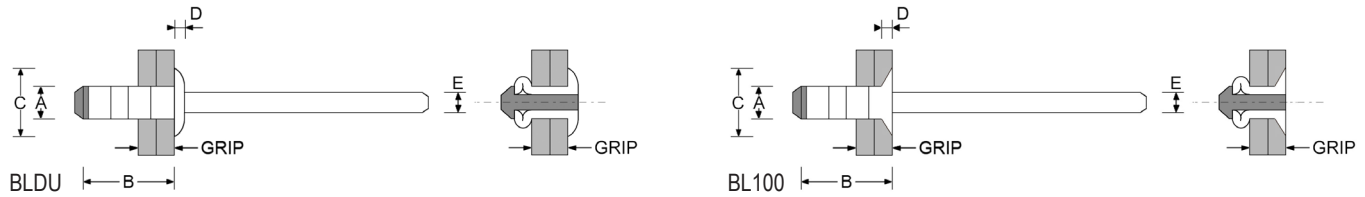

Diameter	Part Code	Grip Range	Hole Size (nom)	A	B	C	D	E	Shear (min) KN	Tensile (min) KN	Pack Qty
mm		mm	mm	mm	mm	mm	mm	mm			pcs

### BLDU | Stainless Steel Rivet | Stainless Steel Mandrel | Dome Head

4.8	BLDU-06090	1.50 - 3.50	4.90 - 5.10	4.80	9.00	9.80	2.20	3.02	6.08	5.00	50
	BLDU-06115	3.50 - 6.00	4.90 - 5.10	4.80	11.5	9.80	2.20	3.02	6.08	5.00	50
	BLDU-06140	6.00 - 8.50	4.90 - 5.10	4.80	14.0	9.80	2.20	3.02	6.08	5.00	50
	BLDU-06165	8.50 - 11.0	4.90 - 5.10	4.80	16.5	9.80	2.20	3.02	6.08	5.00	50
6.4	BLDU-08105XG	2.00 - 4.50	6.60 - 6.70	6.40	10.5	13.0	3.00	4.17	14.1	8.33	50
	BLDU-08125XG	4.00 - 6.50	6.60 - 6.70	6.40	12.5	13.0	3.00	4.17	14.1	8.33	50
	BLDU-08145XG	5.00 - 8.50	6.60 - 6.70	6.40	14.5	13.0	3.00	4.17	14.1	8.33	50
	BLDU-08165XG	7.00 - 10.5	6.60 - 6.70	6.40	16.5	13.0	3.00	4.17	14.1	8.33	50
	BLDU-08185XG	9.00 - 12.5	6.60 - 6.70	6.40	18.5	13.0	3.00	4.17	14.1	8.33	50
	BLDU-08205XG	11.0 - 14.5	6.60 - 6.70	6.40	20.5	13.0	3.00	4.17	14.1	8.33	50
	BLDU-08225XG	13.0 - 16.0	6.60 - 6.70	6.40	22.5	13.0	3.00	4.17	14.1	8.33	50
7.8	BLDU-10135XG	4.00 - 7.00	8.00 - 8.30	7.80	13.5	16.0	3.80	5.12	20.1	12.7	50
	BLDU-10165XG	7.00 - 10.0	8.00 - 8.30	7.80	16.5	16.0	3.80	5.12	21.5	12.7	50
	BLDU-10195XG	10.0 - 13.0	8.00 - 8.30	7.80	19.5	16.0	3.80	5.12	21.5	12.7	50
	BLDU-10225XG	13.0 - 16.0	8.00 - 8.30	7.80	22.5	16.0	3.80	5.12	21.5	12.7	50

### BL100 | Stainless Steel Rivet | Stainless Steel Mandrel | 100° Countersunk Head

6.4	BL100-U8135	4.80 - 7.80	6.60 - 6.80	6.40	13.5	10.0	2.00	4.17	14.4	8.33	50
	BL100-U8155	6.80 - 9.80	6.60 - 6.80	6.40	15.5	10.0	2.00	4.17	14.4	8.33	50
	BL100-U8175	8.80 - 11.8	6.60 - 6.80	6.40	17.5	10.0	2.00	4.17	14.4	8.33	50

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.  
Revised February 2024