


Steel Thin Large Flange Rivet-Nuts

Highest resistance to vibration and spin-out of all round bodied inserts. Flange with near flush finish. Very wide grip range. Low torque required to install.

Material: Steel

Finish: Zinc Plated

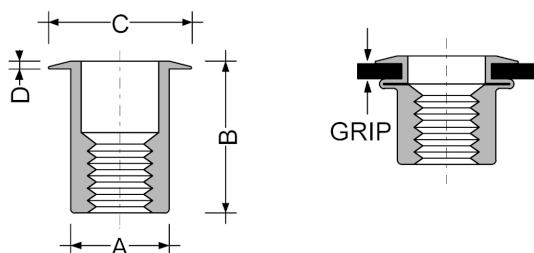

Thread Size	Part Code	Grip Range	Hole Size	A	B	C	D	Pull-Out	Push-Out	Maximum Torque
		mm	mm	mm	mm	mm	mm	(min) KN	(min) KN	Nm
M4	IN-YLF04-2.0	0.50 - 2.00	6.75	6.70	11.45	9.91	0.75	6.90	2.00	5.90
	IN-YLF04-3.3	2.00 - 3.30	6.75	6.70	12.70	9.91	0.75	6.90	2.00	5.90
M5	IN-YLF05-3.3	0.50 - 3.30	7.60	7.50	12.85	10.5	0.75	7.80	2.90	9.80
	IN-YLF05-5.7	3.30 - 5.70	7.60	7.50	15.50	10.5	0.75	7.80	2.90	9.80
M6	IN-YLF06-4.2	0.70 - 4.20	10.0	9.90	15.50	12.7	0.75	11.0	3.90	18.1
	IN-YLF06-6.6	4.20 - 6.60	10.0	9.90	18.00	12.7	0.75	11.0	3.90	18.1
M8	IN-YLF08-3.8	0.70 - 3.80	13.5	13.45	18.40	17.4	0.90	20.0	6.90	29.4
	IN-YLF08-7.9	3.80 - 7.90	13.5	13.45	21.35	17.4	0.90	20.0	6.90	29.4
M10	IN-YLF10-3.8	0.70 - 3.80	13.50	13.45	18.40	17.4	0.90	20.0	6.90	45.0
	IN-YLF10-7.9	3.80 - 7.90	13.50	13.45	21.20	17.4	0.90	20.0	6.90	45.0
M12	IN-YLF12-5.1	1.60 - 5.10	17.45	17.40	30.40	22.0	1.20	19.9	-	72.0
	IN-YLF12-8.9	5.10 - 8.90	17.45	17.40	34.21	22.0	1.20	19.9	-	72.0
	IN-YLF12-12.7	8.90 - 12.7	17.45	17.40	37.99	22.0	1.20	19.9	-	72.0

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
Revised January 2024