


Steel Low Profile Closed End Rivet-Nuts

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance. For applications where sealing to prevent the ingress of solids or moisture is desirable.

Material: Steel

Finish: Zinc Plated

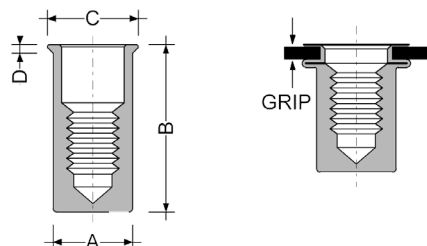

Thread Size	Part Code	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	Pull-Out (min) KN	Push-Out (min) KN	Maximum Torque Nm
M4	IN38-M4	0.50 - 2.50	6.00	5.95	15.0	6.80	0.50	5.40	1.50	5.10
M5	IN38-M5	0.50 - 2.50	7.00	6.95	18.0	7.90	0.50	6.40	2.00	7.80
M6	IN38-M6	0.50 - 3.00	9.00	8.95	21.5	10.0	0.50	12.7	2.50	12.4
M8	IN38-M8	1.00 - 3.20	11.0	10.95	22.5	12.0	0.50	13.7	2.90	16.4

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
Revised September 2023