


Stainless Low Profile Rivet-Nuts

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance.

Material: 304 Stainless Steel / *Non splined body* *

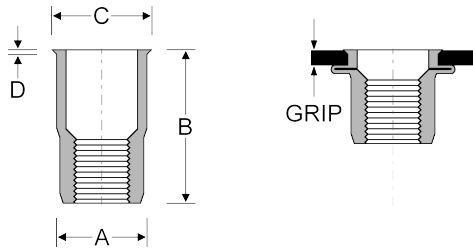

Thread Size (Pitch)	Part Code	Grip Range (Min ~ Max) mm	Hole Size (+0.10) mm	A mm	B (+0.50) mm	C (±0.30) mm	D (±0.20) mm	Pull-Out (Min) kN	Push-Out (Min) kN	Torque (Max) Nm
M3 x 0.50	IN39006S-0315	0.50 ~ 2.00	5.00	4.95	9.00	6.00	0.50	4.90	2.00	3.00
M4 x 0.70	IN39006S-0425 IN39006S-0440	0.50 ~ 2.50 2.50 ~ 4.00	6.00	5.95	11.0 12.5	7.00	0.50	9.80	2.90	4.90
M5 x 0.80	IN39006S-0530 IN39006S-0545	0.50 ~ 3.00 2.50 ~ 4.50	7.00	6.95	12.0 13.5	8.00	0.50	15.7	2.90	9.80
M6 x 1.00	IN39006S-0630 IN39006S-0650	0.50 ~ 3.00 3.00 ~ 5.00	9.00	8.95	14.0 16.0	10.0	0.50	20.6 22.6	3.00	15.5
M8 x 1.25	IN39006S-0830 IN39006S-0855	0.50 ~ 3.00 3.00 ~ 5.50	11.0	10.9	16.0 18.5	12.0	0.50	29.4	4.00	29.5
M10 x 1.50	IN39006S-1035 IN39006S-1060	1.00 ~ 3.50 3.50 ~ 6.00	13.0	12.9	19.0 21.5	14.2	0.80	42.2	6.00	35.0

All diagrams and drawings are intended for illustration and measurement purposes only. Dimensions and specifications may change without prior notice. Please refer to your distributor for the most up-to-date data sheet. The test data presented offers approximate average strength values based on multiple tests conducted in various materials and thicknesses. For applications requiring precise strength figures or when the applied load approaches the published values, we strongly recommend conducting tests specific to your use case.

REVISED MARCH 2025