


316 Stainless Large Flange Rivet-Nuts

The Large Flange head of the IN9408S Series is optimal for high push-out applications. Designed for installation into metric holes, key features include a Tapered body for easy insertion and Splined body to improve torque-to-turn resistance.

Material: 316 Stainless Steel

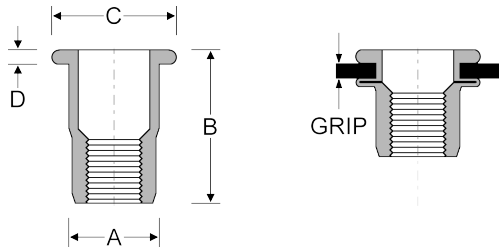

| Thread Size (Pitch) | Part Code | Grip Range (Min ~ Max) mm | Hole Size (+0.10) mm | A mm | B (±0.30) mm | C (±0.50) mm | D (±0.10) mm | Pull-Out (Min) kN | Push-Out (Min) kN | Torque (Max) Nm |
|------------------------|----------------|---------------------------------|----------------------------|---------|--------------------|--------------------|--------------------|-------------------------|-------------------------|-----------------------|
| M5 x 0.80 | IN9408S-0530A4 | 0.30 ~ 3.00 | 7.00 | 6.95 | 12.0 | 10.0 | 1.00 | 15.7 | 6.90 | 9.80 |
| M6 x 1.00 | IN9408S-0630A4 | 0.50 ~ 3.00 | 9.00 | 8.95 | 14.0 | 12.0 | 1.50 | 20.6 | 9.80 | 15.5 |
| M8 x 1.25 | IN9408S-0830A4 | 0.50 ~ 3.00 | 11.0 | 10.9 | 16.0 | 15.0 | 1.50 | 29.4 | 12.7 | 29.5 |
| M10 x 1.50 | IN9408S-1035A4 | 1.00 ~ 3.50 | 13.0 | 11.9 | 19.0 | 17.0 | 2.00 | 42.2 | 15.7 | 35.0 |