


Steel Large Flange Closed End

Optimal for high push-out applications. Dimensioned for installation into hard metric holes. Tapered entry. For applications where sealing to prevent the ingress of solids or moisture is desirable.

Material: Steel
Finish: Zinc Plated

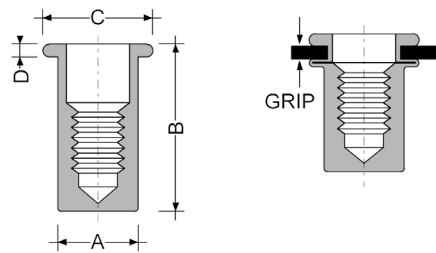

Thread Size	Part Code	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	Pull-Out (min) KN	Push-Out (min) KN	Maximum Torque Nm
M4	IN9410-0425	0.50 - 2.50	6.00	5.90	15.7	9.00	0.80	5.70	2.10	4.90
M5	IN9410-0525	0.50 - 2.50	7.00	6.90	18.0	10.0	1.00	10.7	3.00	7.80
M6	IN9410-0630	0.70 - 3.00	9.00	8.90	21.5	13.0	1.50	11.1	5.30	12.7
M8	IN9410-0830	0.70 - 3.00	11.0	10.9	24.5	16.0	1.50	18.1	6.90	16.7
M10	IN9410-1035	1.00 - 3.50	12.0	11.9	29.0	16.0	1.70	28.6	8.70	40.0

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
Revised January 2024