


Steel HEX Large Flange Closed End

Large flange head, used in conjunction with a hexagon hole to give maximum resistance to applied torque or unscrewing torque. For applications where sealing to prevent the ingress of solids or moisture is desirable.

Material: Steel

Finish: Zinc Plated

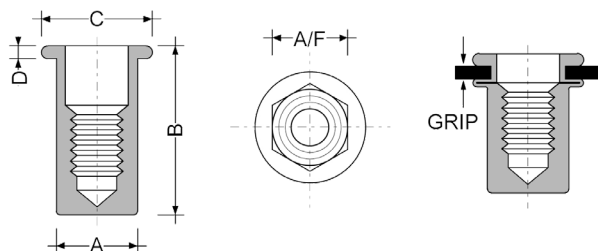

Thread Size	Part Code	Grip Range mm	Hole Size (Hex A/F) mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M5	IN9498-0530-CE	0.50 - 3.00	7.00	6.90	20.0	10.0	1.00	10.8	2.90	8.80
M6	IN9498-0630-CE	0.50 - 3.00	9.00	8.90	23.0	13.0	1.50	14.7	5.90	14.7
M8	IN9498-0830-CE	0.70 - 3.00	11.0	10.9	26.0	16.0	1.50	20.6	6.90	39.2

Dimensions and specifications are subject to change without notice. Check your distributor for the latest data sheet. The test data provides approximate strength values averaged in multiple tests in various materials and thicknesses. We recommend testing your application when an exact strength figure is required, or the load to be applied comes close to the published data.
Revised January 2024