


Steel Standard Lockbolts

Standard Lockbolts offer high shear and tensile strength, excellent vibration resistance and sealing properties. Quick and simple to install, Standard Lockbolts provide consistent high uniform clamp force with every installation. Standard Lockbolts are available with standard or flanged collars.


Material: Lockbolt: Steel
Collar: Steel

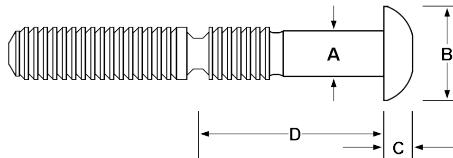


Diameter mm	Part Code	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	Clamp KN	Shear KN	Tensile KN
6.4	SDLB-0802	1.60 - 4.80	6.80	6.60	13.4	3.90	13.2	8.00	13.5	13.3
	SDLB-0803	3.20 - 6.40	6.80	6.60	13.4	3.90	14.8	8.00	13.5	13.3
	SDLB-0804	4.80 - 7.90	6.80	6.60	13.4	3.90	16.4	8.00	13.5	13.3
	SDLB-0805	6.40 - 9.50	6.80	6.60	13.4	3.90	18.0	8.00	13.5	13.3
	SDLB-0806	7.90 - 11.1	6.80	6.60	13.4	3.90	19.6	8.00	13.5	13.3
	SDLB-0808	11.1 - 14.3	6.80	6.60	13.4	3.90	22.7	8.00	13.5	13.3
	SDLB-0810	14.3 - 17.5	6.80	6.60	13.4	3.90	25.9	8.00	13.5	13.3
	SDLB-0812	17.5 - 20.6	6.80	6.60	13.4	3.90	29.1	8.00	13.5	13.3
	SDLB-0814	20.6 - 23.8	6.80	6.60	13.4	3.90	32.3	8.00	13.5	13.3
	SDLB-0816	23.8 - 27.0	6.80	6.60	13.4	3.90	35.4	8.00	13.5	13.3
	SDLB-0818	27.0 - 30.2	6.80	6.60	13.4	3.90	38.6	8.00	13.5	13.3
	SDLB-0820	28.6 - 34.9	6.80	6.60	13.4	3.90	41.8	8.00	13.5	13.3
9.6	SDLB-1210	12.7 - 19.1	10.0	9.80	20.0	6.30	30.9	17.8	30.5	28.0
	SDLB-1212	15.9 - 22.2	10.0	9.80	20.0	6.30	34.1	17.8	30.5	28.0
	SDLB-1214	19.1 - 25.4	10.0	9.80	20.0	6.30	37.3	17.8	30.5	28.0
	SDLB-1216	22.2 - 28.6	10.0	9.80	20.0	6.30	40.5	17.8	30.5	28.0

Collar Diameter (nom)	Collar Type	Part Code	A (max) mm	B (max) mm	C (max) mm
6.4	Standard	SLC-R8G	10.1	8.20	-
	Flanged	SLCF-2R8G	10.1	9.50	13.2
9.6	Standard	SLC-R12G	14.9	11.9	-
	Flanged	SLFC-2R12G	15.2	13.3	19.7

Standard



Flanged



When using flanged Collars the max grip is reduced by the flange thickness
(6.4mm = 2.0m, 9.6mm = 3.2mm)

PERFORMANCE GUIDE - These figures represent minimum fastener shear and tensile strength values with the use of a standard collar.