


Stainless CSK-120° Standard Rivets

Standard rivets are used in numerous applications to secure two or more components together. Typically used in sheet type products, the Standard rivet is easily installed with access only required from one side of the assembly.

Material: Body: 304 Stainless Steel
Mandrel: 304 Stainless Steel

Finish: Body: Polished
Mandrel: Natural

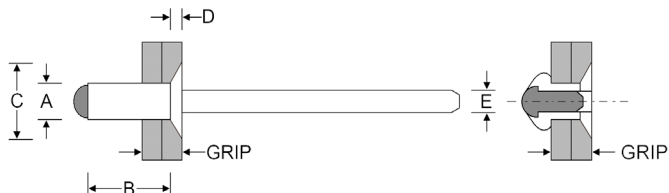

Diameter (A) mm	Part Code	Grip Range (Min ~ Max) mm	Hole Size (Nominal) mm	B mm	C mm	D mm	E mm	Shear (Min) kN	Tensile (Min) kN	Pack Size Pcs
304 (A2) Grade Stainless										
3.20 (1/8)	72STST-0402	1.60 ~ 3.20	3.30	6.70	5.80	1.10	1.80	1.87	2.36	1,000
	72STST-0403	3.20 ~ 4.80		8.20						1,000
	72STST-0404	4.80 ~ 6.40		9.70						1,000
	72STST-0406	7.90 ~ 9.50		12.7						1,000
4.00 (5/32)	72STST-0503	1.60 ~ 4.80	4.10	8.90	7.10	1.40	2.40	2.90	3.65	1,000
	72STST-0504	4.80 ~ 6.40		10.5						1,000
	72STST-0506	7.90 ~ 9.50		14.0						1,000
4.80 (3/16)	72STST-0604	4.80 ~ 6.40	4.90	11.1	8.90	1.90	2.70	4.23	5.34	500
	72STST-0606	7.90 ~ 9.50		14.3						500
	72STST-0608	9.50 ~ 12.7		17.5						500
	72STST-0610	12.7 ~ 15.9		20.7						500
316 (A4) Grade Stainless										
4.80 (3/16)	72STST-0604-A4	4.80 ~ 6.40	4.90	11.0	8.90	1.90	2.70	4.23	5.34	500
	72STST-0606-A4	7.90 ~ 9.50		14.0						500
	72STST-0608-A4	9.50 ~ 12.7		17.0						500
	72STST-0610-A4	12.7 ~ 15.9		20.0						500