


Steel HuckLok® Rivets

The HuckLok® rivet is a Structural fastener that combines the wide grip range of our SR Series with the high shear and high tensile strength of the Magna-Bulb. An extra large blind side footprint is Ideal for lower strength or thin sheet joints. The flush pinbreak ensures there is no catching on clothes, skin or goods. Quick and easy visual inspection and Internal mandrel locking mechanism to secure the rivet body within.



**Material:** Body: Low Carbon Steel  
Mandrel: Medium Carbon Steel  
**Finish:** Body: Zinc Plated  
Mandrel: Zinc Plated

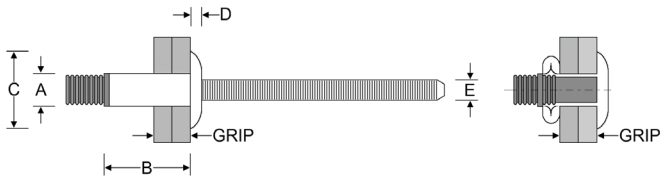

Diameter (A) mm	Part Code	Grip Range (Min ~ Max) mm	Hole Size (±0.10) mm	B mm	C mm	D mm	E mm	Shear (Min) kN	Tensile (Min) kN	Pack Size Pcs
4.80 (3/16)	HKLP-R6-5	1.60 ~ 7.90	5.00	22.9	9.90	2.60	3.00	8.50	4.40	100
6.40 (1/4)	HKLP-R8-6	2.00 ~ 9.50	6.70	28.3	11.9	3.00	4.00	15.6	8.50	50
	HKLP-R8-10	9.50 ~ 15.9		34.7						50
	HKLP-R8-12	12.7 ~ 19.0		37.9						50
	HKLP-R8-14	15.9 ~ 22.2		41.1						50

All diagrams and drawings are intended for illustration and measurement purposes only. Dimensions and specifications may change without prior notice. Please refer to your distributor for the most up-to-date data sheet. The test data presented offers approximate average strength values based on multiple tests conducted in various materials and thicknesses. For applications requiring precise strength figures or when the applied load approaches the published values, we strongly recommend conducting tests specific to your use case.

REVISED MARCH 2025